
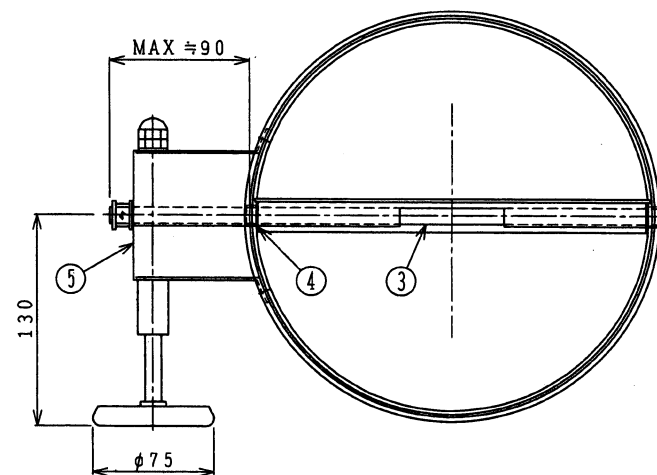


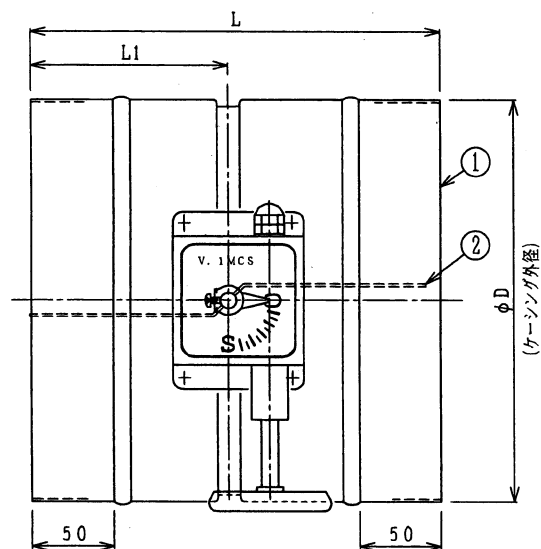

VD-2-1MCS-300	300	298		
VD-2-1MCS-275	275	273	145	300
VD-2-1MCS-250	250	248		
VD-2-1MCS-225	225	223	120	250
VD-2-1MCS-200	200	198		
VD-2-1MCS-175	175	173		
VD-2-1MCS-150	150	148	95	220
VD-2-1MCS-125	125	123		
VD-2-1MCS-100	100	98		
品番	呼称径	φ D	L1	L

●本図ダンパーの使用範囲
 静圧：±500Pa (±50mmAq)
 風速：15m/s以下
 温度：-10～+50℃ (凍結ナキコト)

注：表面処理はカチオン電着塗装、但し#5のハンドル等組付部品は亜鉛メッキ。

5	開閉器	1	DAIRITSU V-1MCS
4	軸受	2	黄銅板 t0.6
3	軸	1	SWMB φ10
2	可動羽根	1	SPHC t1.6
1	ケーシング	1	SPHC t1.6

Mark	Date	変更 Remark	表面処理 Surface treatment カチオン電着塗装 N7 (グレー) 台/個数 Quantity	尺度 Scale	承認 App'd	検図 Chk'd	設計 Csg'd	製図 Dwg.	機種 Model	番号 No.	名称 Name	個数 Q'ty	備考 Remark
①													
②													
③													
④													
					07.06.20	07.06.20	2007.06.20		品名 Name 手動操作 V-1MCS (横走りダクト用) 丸形 風量調節ダンパー	図番 Dwg. No. 07-22407-V			
										Rev. -1			
										株式会社 DAIRITSU CO., LTD			